



CASTOR

1100

2500

3700

4500

6500



Recyclage
Recycling



Palettes
Pallets



Chutes diverses
Trims and cuts



LE BOIS MAÎTRISÉ
WOOD UNDER CONTROL





BROYEURS CASTOR

SHREDDERS CASTOR

Ces broyeurs sont des machines de production industrielle. Leur conception permet leur alimentation avec des produits de sources variées, afin de produire des broyats adaptés aux différents besoins. Consommation, coûts de maintenance et durée de vie sont optimisés et font partie des références du marché.

These shredders are high production machines. Their robustness and versatility allow their use for various applications, from a wide range of materials. Operating / maintenance costs and service life are optimized and among the best on the market.

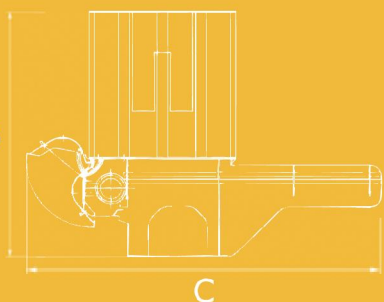

Grille adaptée
Adapted screening

Rotor à couteaux
Straight knife drum

Tiroir d'alimentation
Infeed drawer

Consommation Optimisée
Optimized Consumption

Sécurité et Protecteur
Protection and Safety



CASTOR

MODÈLE

	1100	2500	3700	4500	6500
Poids (kg)	2500	4800	6100	8400	9000
Dimension base trémie (mm)	850 X 1200	1300 X 1800	2000 X 1800	2500 X 1800	2500 X 2200
Puissance (kw)	15-18,5	30-37	45-55	75-90	90-110
Capacité max* (t/h) <small>*Selon la matière à broyer et la grille</small>	0,5	1,2	5	10	10
Vitesse du rotor (t/mn)	100	100	100	100	100
Nombres de couteaux	17/34	54/79	80/108	108/120	120
Perçage de la grille (mm)	15-80	15-80	15-80	15-80	15-80
Diamètre du rotor (mm)	370	370	370	400	400
Dimension (mm)	A 2010 B 2000 C 2990	2140 2700 4020	3330 3350 4070	3500 3350 4070	3500 3350 5840

Options :

Bouclier articulé	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Grille articulée	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Trémie basculante	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

MODEL

	1100	2500	3700	4500	6500
Weight (kg)	2500	4800	6100	8400	9000
Intake opening (mm)	850 X 1200	1300 X 1800	2000 X 1800	2500 X 1800	2500 X 2200
Power (kw)	15-18,5	30-37	45-55	75-90	90-110
Max capacity* (t/h) <small>*Upon infeed material and screening</small>	0,5	1,2	5	10	10
Rotor speed (rpm)	100	100	100	100	100
Number of tools	17/34	54/79	80/108	108/120	120
Screening holes (mm)	15-80	15-80	15-80	15-80	15-80
Rotor diameter (mm)	370	370	370	400	400
Dimensions (mm)	A 2010 B 2000 C 2990	2140 2700 4020	3330 3350 4070	3500 3350 4070	3500 3350 5840

Options :

Articulated hood	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Articulated screen	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Tilting feeder	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>